


- Double Pole Switching
- Neon Indicator
- Safety Shutter System

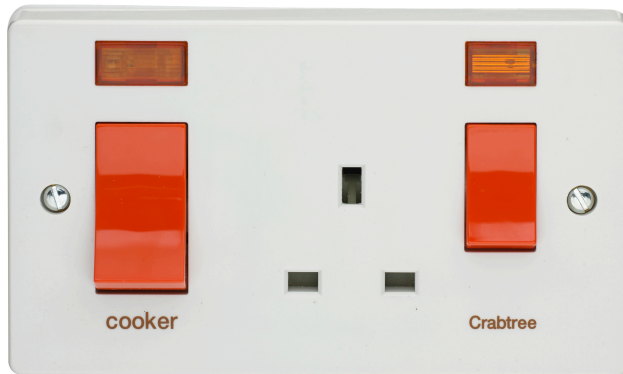

Product Specification Data

Revision Date: 15/10/2021

Product Standard/s	BS 4177, BS 1363-2
Terminal Capacity L&N	2 x 6.0, 1 x 10, 1 x 16 mm ²
Terminal Capacity E	2 x 6.0, 1 x 10.0, 1 x 16.0 mm ²
Frequency	50 Hz
LRV Value	74
Printing	Cooker
CE Conformity	Yes
WEEE Symbol	Yes
UKCA Conformity	Yes
Wiring system	2-pole switch
Method of operation	Rocker/button
Assembly arrangement	Control element
Number of modules (module system)	0
Push button switch	Yes
Number of rockers	2
Mounting method	Flush mounted (plaster)
Type of fastening	Screw mounting
With mounting plate	Yes
Material	Plastic
Material quality	Other
Halogen free	Yes
Surface protection	Other
Surface finishing	Glossy
Colour	White
Illumination	Yes
Function lighting	Illuminated (on)
Type of lighting	Not included
Suitable for degree of protection (IP)	IP2X
Nominal voltage	250 V

Rated current	45 A
Connection type	Screw terminal
Width of device	146 mm
Height of device	86 mm
Built-in depth	24 mm
Min. depth of built-in installation box	47 mm



Venus Electric
Address: Salah Al-Din Al Ayoubi St, Jabal Alhussein,
Amman
Phone: +962 79196 6817
Fax: 064640203
Email: info@venuselect.com
Website: www.venuselect.com